




4

Posts for the 'Dullok' system are rolled hollow section steel in a variety of sections dependent upon height. Panels fix to the posts with supporting clips attached to the section with threaded inserts, and then clamp in place, with a full length clamp bar using stainless steel security fasteners, giving a complete fully clamped fixture. (4)



5

The 'Dullok' rebound panel has been created to complement the standard panel system, giving a rebound face for ball play off. (5)



6

Gates and entrance ways for sports areas are specifically designed and manufactured to comply with current recommendations and regulations, in view of providing a flush face with protected edges and gate fixtures. (3,6)

CONTACT

sales@fecco.co.nz

0800 3362464



FENCING

Dullok



DULOK

The **'Dulok'** twin diameter wire mesh (1) is resistant to cutting and with security fasteners means that it is vandal resistant. Dulok comes in panel heights 630mm < 2430mm and can be extended with further panels to any required height. (2)

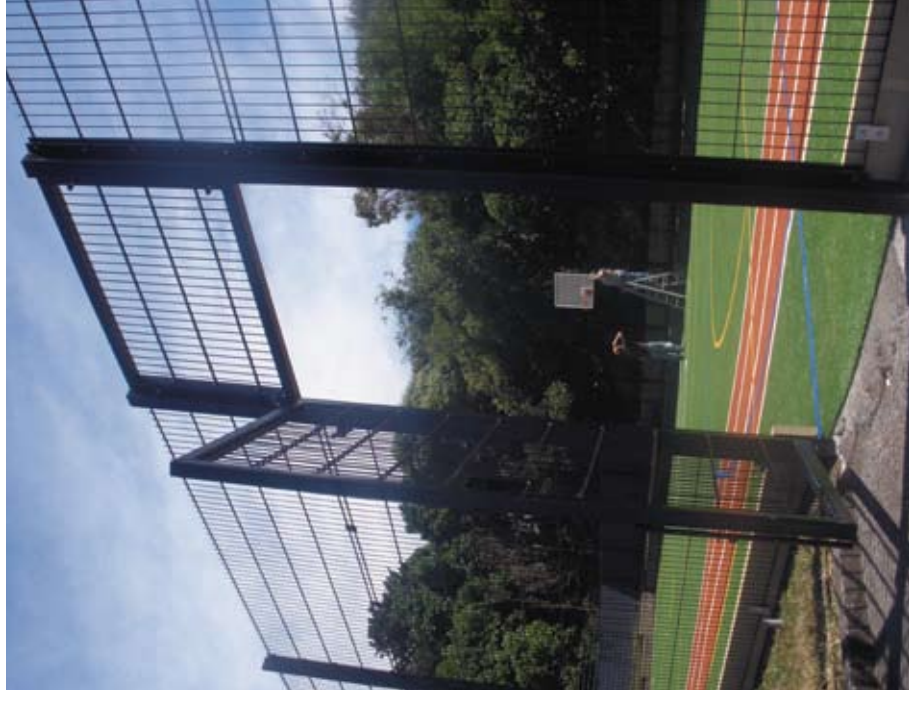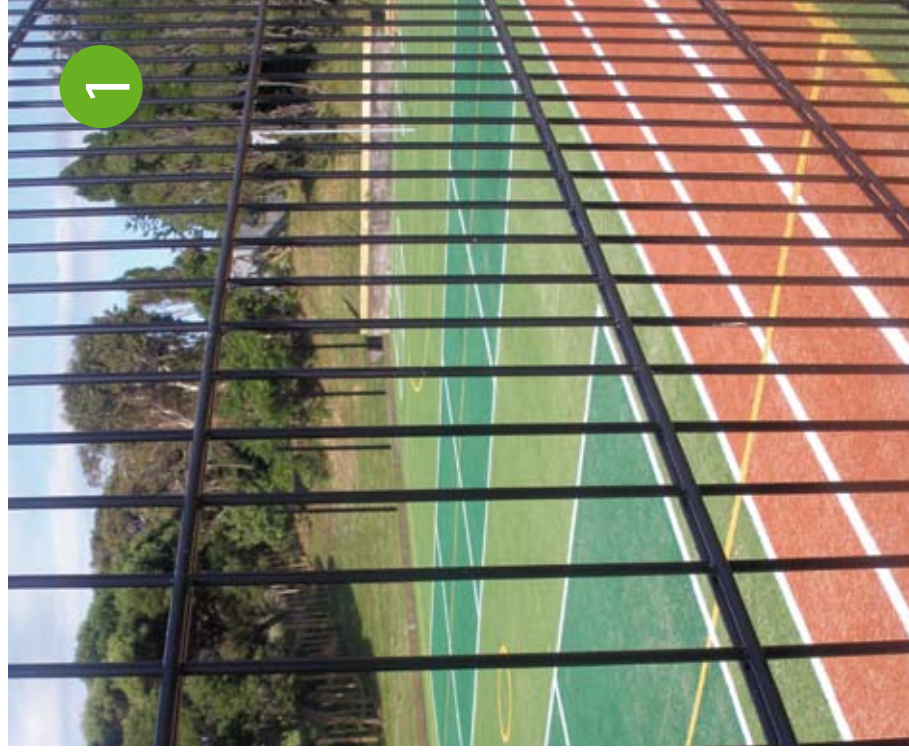

'Dulok' is a very robust, maintenance free panel system that can withstand the punishment of continual use by today's high powered sportsmen and women.